


Socket : Nylon 66, UL 94V-2.  
Can be easily detached or re-attached.




Wire : UL SPT-2 AWG18,  
conductor dia 0.2mm x 42 =  
1.3sqmm, can be cut or  
reconnected anywhere.

Max. Run : 20 meters

LED : 12V 0.025A = 0.3W  
60,000 hours life




CP-MP20 : 1 METER MIRROR PANEL,  
WITH HOLES 20CM SPACING



WATER CLEAR SOLID ACRYLIC



- CP-CR40** Acrylic Crystal Ball 40mm
- CP-CR50** Acrylic Crystal Ball 50mm
- CP-CR60** Acrylic Crystal Ball 60mm
- CP-RG30** Surface Mount Ring
- CP-PR25** Outdoor Waterlight rubber ring
- CP-WN20** Wire with socket (Specify length and spacing)
- CP-RON20** Reflection Diamond 20mm
- CP-RON30** Reflection Diamond 30mm

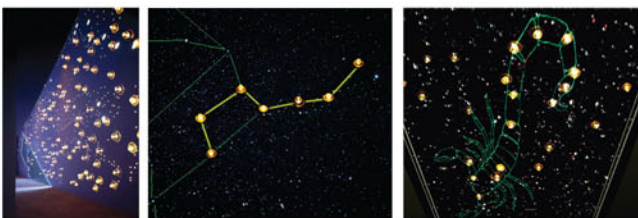

P/N	LED	VOLT	IF/mA	WATT	MCD	COLOR TEMP	LIFE
CP-L6WW	WARM WHITE	12VDC	25mA	0.3W	120	3000	60000Hrs
CP-L6CW	COOL WHITE	12VDC	25mA	0.3W	120	3000	60000Hrs