SURFACE SIZE

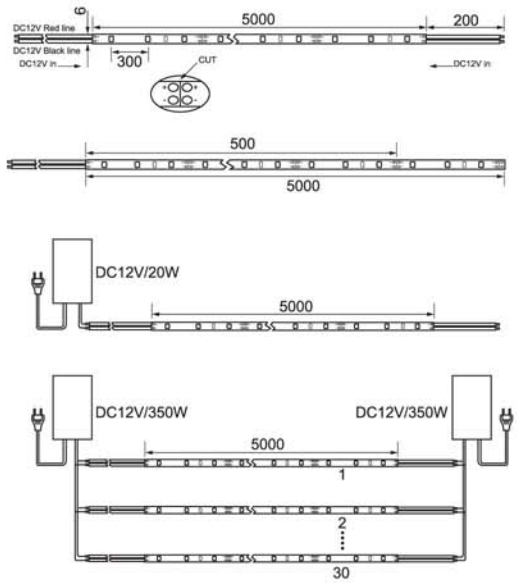

CP-236-32101I-R500

SIZE	5000*6mm/loop
STYLE OF LED	3528 LED
OPERATING TEMPERATURE	-40 C to 80 C
COLOR	R, G, B, Y, W, WW
VIEWING ANGLE	120
LIFE TIME	30 kh
INPUT VOLTAGE	DC12V

TECHNICAL PARAMETER

MODEL		LED		CURRENT	POWER	SURFACE LUMINOUS	LUMINOSITY UNDER
	COLOR	WAVE LENGTH	QTY(PCS.)			ITENSITY	0.5m. DISTANCE
CP-236-32101I-R500		625-630	210	1.2 0.2A	15W	700Lux	8Lux
CP-236-32101I-G500		518-522	210	1.2 0.2A	15W	3200Lux	46Lux
CP-236-32101I-B500		465-468	210	1.2 0.2A	15W	400Lux	4Lux
CP-236-32101I-Y500		588-592	210	1.2 0.2A	15W	340Lux	9Lux
CP-236-32101I-W500		.....	210	1.2 0.2A	15W	4300Lux	55Lux
CP-236-32101I-WW500		.....	210	1.2 0.2A	15W	4200Lux	54Lux

C & P LIGHTING CO.,LTD.
75/54 FL. 16 Richmond Bldg., Sukhumvit 26 Road
Klongton, Klongtoey, Bangkok 10110 Thailand
Tel : (662) 261 8389-93 Fax : (662) 261 8394
www.c-plighting.com E-mail : info@c-plighting.com

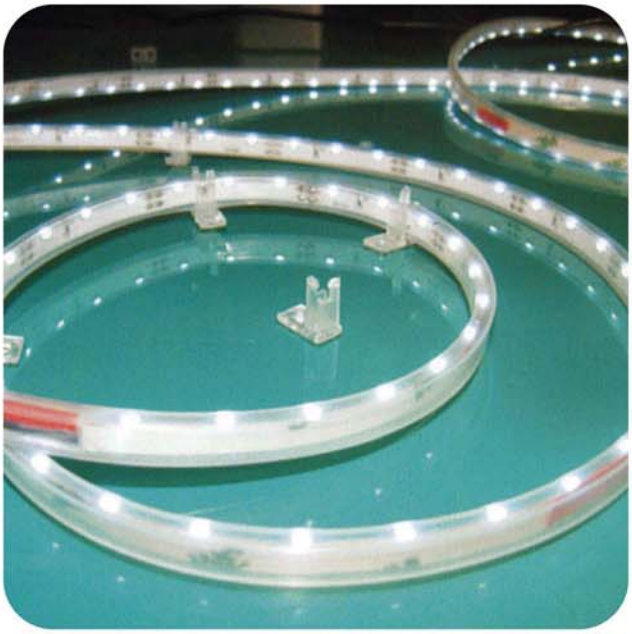

SURFACE SIZE

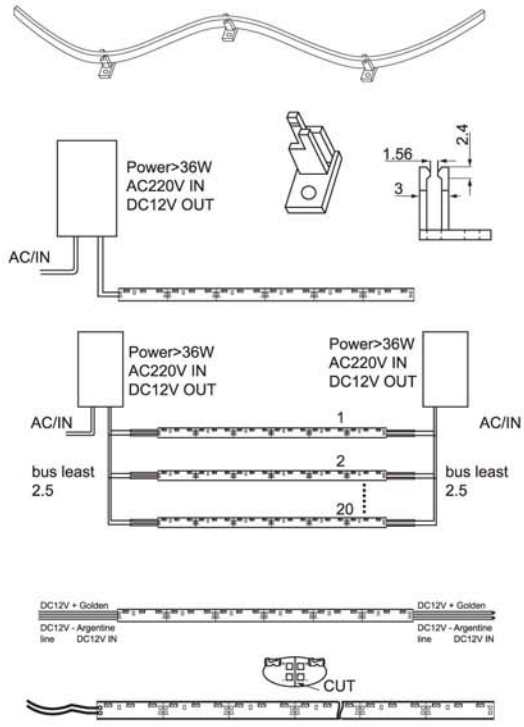

CP-236-93001S-R500

SIZE	5000*9mm/loop
STYLE OF LED	TOP LED
OPERATING TEMPERATURE	-40 C to 80 C
COLOR	R, G, B, Y, W, WW
VIEWING ANGLE	120
LIFE TIME	30 kh
INPUT VOLTAGE	DC12V
RESISTING LEVEL	IP65

TECHNICAL PARAMITER

MODEL		LED		CURRENT	POWER	SURFACE LUMINOUS	LUMINOSITY UNDER
	COLOR	WAVE LENGTH	QTY(PCS.)			ITENSITY	0.5m. DISTANCE
CP-236-93001S-R500		618-625	300	2 0.2A	24W	650Lux	8Lux
CP-236-93001S-G500		518-525	300	2 0.2A	24W	5520Lux	118Lux
CP-236-93001S-B500		465-470	300	2 0.2A	24W	1000Lux	12Lux
CP-236-93001S-Y500		588-592	300	2 0.2A	24W	2300 Lux	52Lux
CP-236-93001S-W500		6500k-7000k	300	2 0.2A	24W	7500Lux	133Lux
CP-236-93001S-WW500		3000k-3300k	300	2 0.2A	24W	± 6000Lux	126Lux

C & P LIGHTING CO.,LTD.
75/54 FL. 16 Richmond Bldg., Sukhumvit 26 Road
Klongton, Klongtoey, Bangkok 10110 Thailand
Tel : (662) 261 8389-93 Fax : (662) 261 8394
www.c-plighting.com E-mail : info@c-plighting.com